

DPW125 Submersible Sensor

INSTALLATION GUIDE


DOL Part Number	Sensor Model Number	Sensor Span	Cable Length
SENS-3660-05	191A-1005-A-R-6	5 m w.c. / 197 in w.c.	6 m
SENS-3660-10	191A-1010-A-R-11	10 m w.c. / 394 in w.c.	11 m

Electrical Specification: 0.5 – 4.5 Vdc output, 5 Vdc input

Wetted Materials

Sensor diaphragm:	Al2O3
Sensor body:	PVC
Cable jacket:	PTFE
Internal seals:	FFKM

Note: Sensor connection color code refers to the sensor cable. Installer is responsible for wire color continuity through the junction box. Do not remove vent tube protection filter.

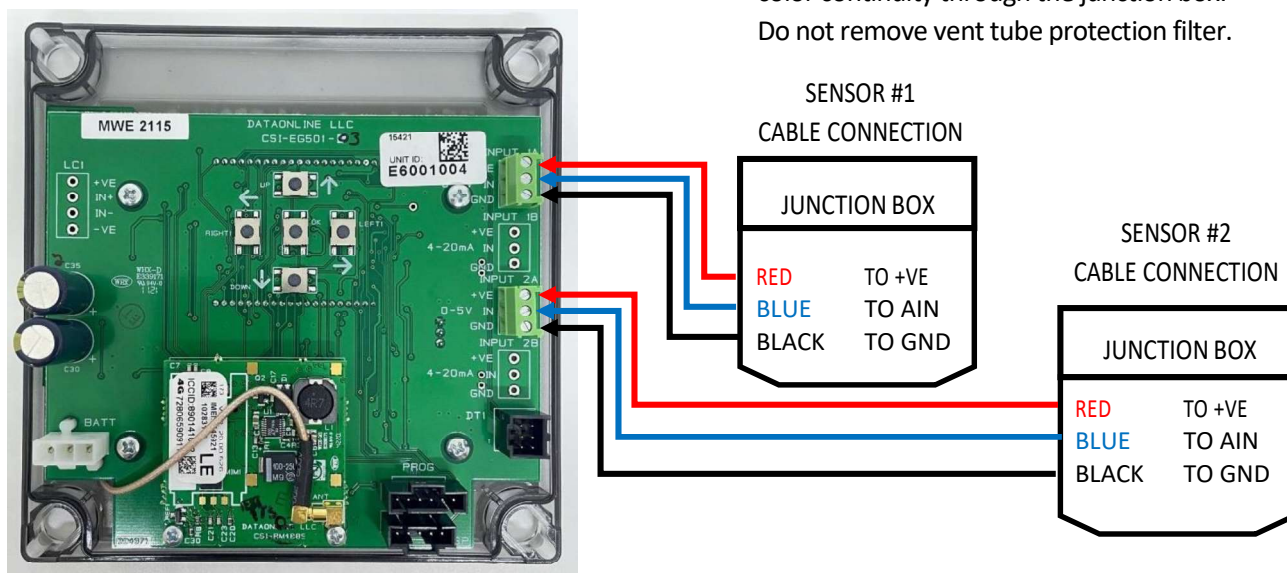

Chemical Compatibility

Suitable for fluids not corrosive to PVC.

Do not use in hot or concentrated acids.

Do not use in flammable liquids that require hazardous location certifications.

A tank with corrosive chemicals shall be sealed from the electrical connections if a junction box is utilized.

GEOGRAPHY

Worldwide

INDUSTRY

Chemicals

PRODUCT LINE

DataOnline

HEADQUARTERS

210 South Street
New Providence, NJ 07974
USA

PHONE (866) 626 8425

+1 (908) 464 2646 (outside U.S.)

E-MAIL techsupport@anova.com

www.anova.com

Submersible Sensors
Installation Guide

Rev 1.6

May 2023